

Marlow DATASHEET®

RONIN HP

SPECIFICALLY DESIGNED FOR USE WITH RONIN POWER ASCENDERS


Ronin Double Cover is a new CE Certified EN1891 Type A 11.5mm semi static rope with black polyester markers.

Essential for Rope Access professionals who require a tough and durable work positioning rope with outstanding heat resistant properties.

Features a red, Nylon inner cover that gives clear indication of outer cover damage.

* Also available in black

“
THE UNIQUE SAFETY FEATURES AND PROVEN LONGEVITY OF THE RONIN HP MAKE IT THE MANUFACTURER'S PREFERRED CHOICE OF ROPE FOR THE RONIN LIFT POWER ASCENDER.
BRYANT BERTRAND
CEO OF RONIN REVOLUTION”

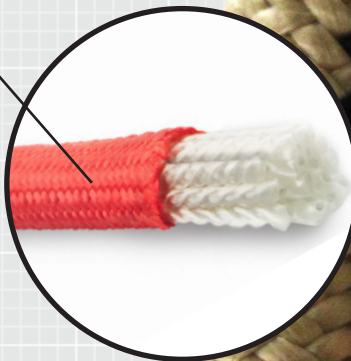

ROPE PROPERTIES:

DIAMETER (mm)	WEIGHT (kg/100m)	LENGTH (m)	LENGTH (ft)	AV. BREAKLOAD WITH FIG. 8 LOOP (kN)	AV. BREAKLOAD (kN)	TEST STANDARDS	CORE MATERIAL	CORE CONSTRUCTION	COVER CONSTRUCTION
11.5	8.96	100	300, 600	23.5	51.3	CE EN1891 Type A	Nylon	Multiple Twisted Nylon	32 plait Technora® with 48 plait red Nylon inner cover

Marlow Ropes Ltd
 Ropemaker Park
 Hailsham
 East Sussex, BN27 3GU
 England

Marlow Ropes, Inc.
 Cordage Business Park
 Plymouth
 MA 02360
 USA

www.marlowropes.com
 UK: +44 (0) 1323 444 444
 sales@marlowropes.com
 US: +1 508 830 0444
 salesusa@marlowropes.com

Disclaimer

Marlow Ropes Ltd endeavours to ensure that all products are manufactured to the highest standard, these guidelines are not intended and do not create any warranties, express or implied. Marlow Ropes Ltd expressly disclaims warranties or representations of any kind, express or implied, including the implied warranties of merchantability and fitness for a particular purpose. Marlow Ropes Ltd shall not be liable for any consequential, incidental or contingent damages whatsoever stemming from the use of these guidelines. Marlow Ropes Ltd has a policy of continual improvement which may result in specification and colour changes without prior notice.



Certification Number 315
 ISO 9001